


SOW2835-R620-B Datasheet

This 2835 LED Light Source is a high performance energy efficient device which can handle high thermal and high driving current. The small package outline and high intensity make it an ideal choice for LED panel light, LED bulb light, LED tube light, backlighting and etc.

This part has a foot print that is compatible to most of the same size LED in the market today.



FEATURES


- Available in Cool White, Neutral White and Warm White color
- ANSI-compatible chromaticity bins
- High luminous Intensity and high efficiency
- Compatible with reflow soldering process
- Low thermal resistance
- Long operation life
- Wide viewing angle at 120°
- Silicone encapsulation
- Environmental friendly, RoHS compliance

APPLICATIONS

- Flat panel light
- Backlighting
- LED tube light
- LED bulb light
- Interior & exterior automotive lighting
- Decorative and landscape lighting
- Signage and channel letter
- Reading lamp
- Decorating and entertainment lighting
- Architectural lighting


Note: The information in this document is subject to change without notice.

PACKAGE DIMENSIONS

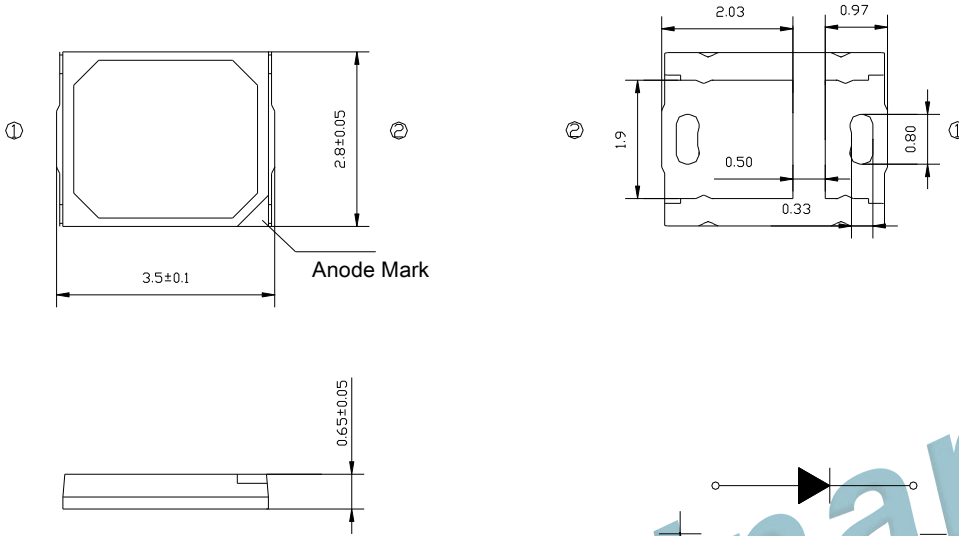

Preliminary

Recommended Solder Pad Design

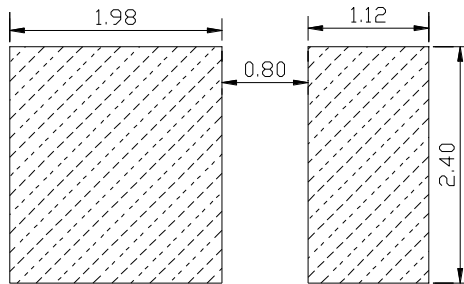

Notes:

1. All dimensions in millimeters.
2. Thickness tolerance of copper plate is $\pm 0.02\text{mm}$.
3. Thickness tolerance of product is $\pm 0.05\text{mm}$.
4. Tolerance is $\pm 0.1\text{mm}$ unless otherwise noted.

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Absolute Maximum Rating	Unit
Forward current	I_F	150	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_d	375	mW
Operating Temperature	T_{opr}	-40~+85	°C
Storage Temperature	T_{stg}	-40~+100	°C
Soldering Temperature	T_{sld}	Reflow Soldering: 260°C for 10 seconds	
LED Junction Temperature	T_j	115	°C

Note:


 I_{FP} Conditions: Pulse Width $\leq 10\text{msec.}$ and Duty $\leq 1/10$.**CHARACTERISTICS (Tj=25°C)**

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage ^[1]	V_F	$I_F=150\text{mA}$	1.9	--	2.5	V
Viewing Angle	$2\theta_{1/2}$	$I_F=150\text{mA}$	--	120	--	deg.
Luminous Flux	Φ_v	$I_F=150\text{mA}$	20	--	26	lm
Thermal Resistance (Junction to Solder Point)	R_{th-js}	$I_F=150\text{mA}$	--	30	--	°C/W


Notes:

1. Luminous flux is measured with an accuracy of $\pm 10\%$.
2. Chromaticity coordinate bins are measured with an accuracy of ± 0.01 .
3. CRI is measured with an accuracy of ± 2 .
4. Some color and CRI bins may have limited availability, please contact us before ordering.
5. All measurements were made under the standardized environment of Shineon


RELATIVE SPECTRAL POWER DISTRIBUTION ($T_j=25^{\circ}\text{C}$)

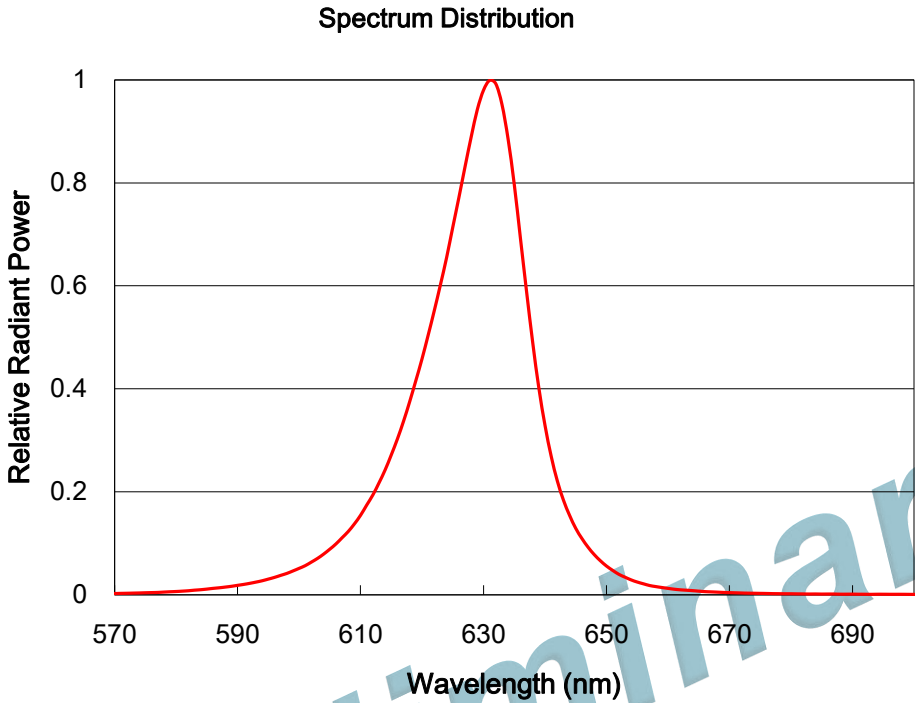


TYPICAL SPATIAL DISTRIBUTION

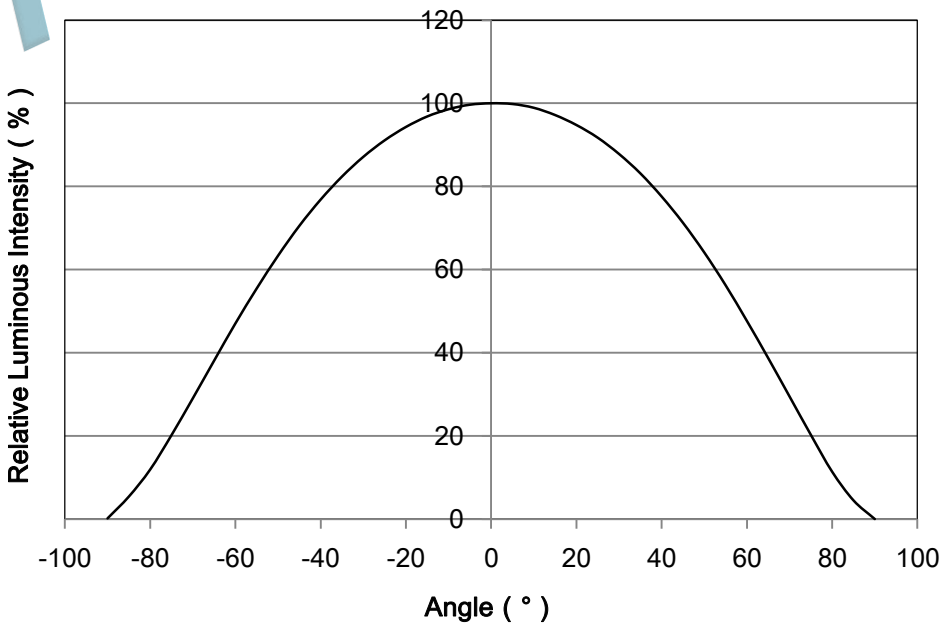


RELATIVE LUMINOUS FLUX VS. CURRENT ($T_j=25^{\circ}\text{C}$)

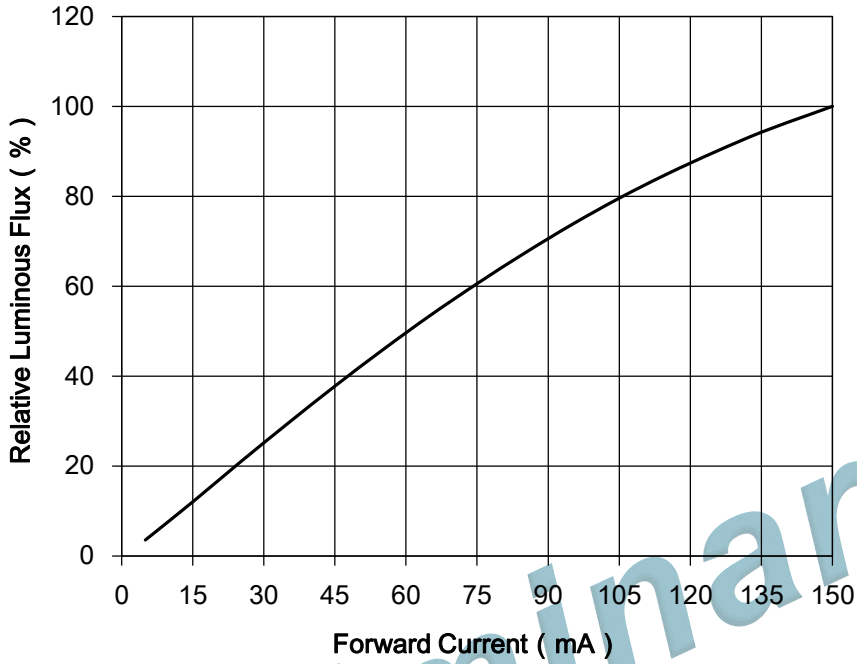


ELECTRICAL CHARACTERISTICS ($T_j=25^{\circ}\text{C}$)

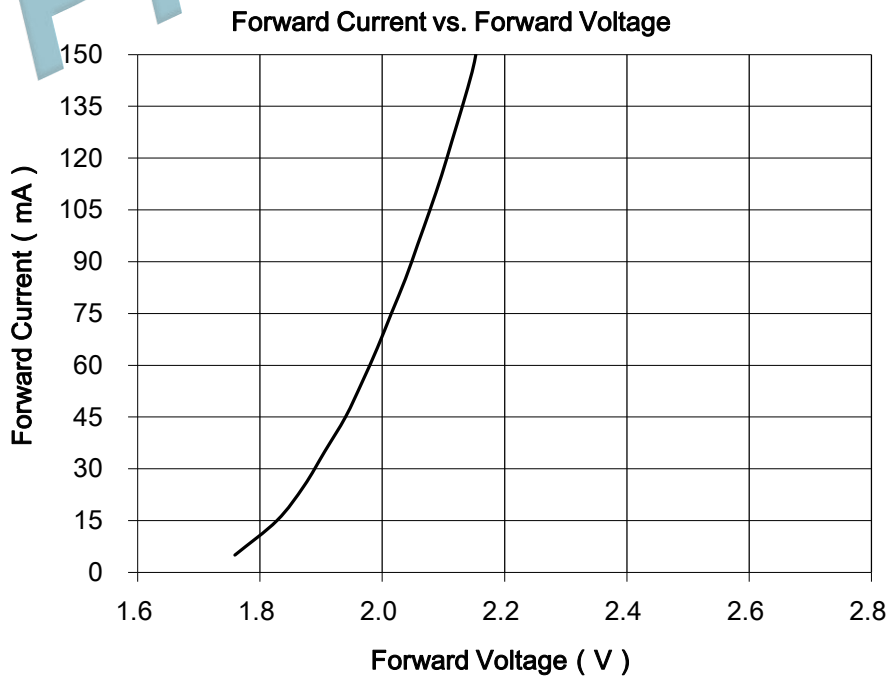

MAXIUM CURRENT VS. AMBIENT TEMPERATURE

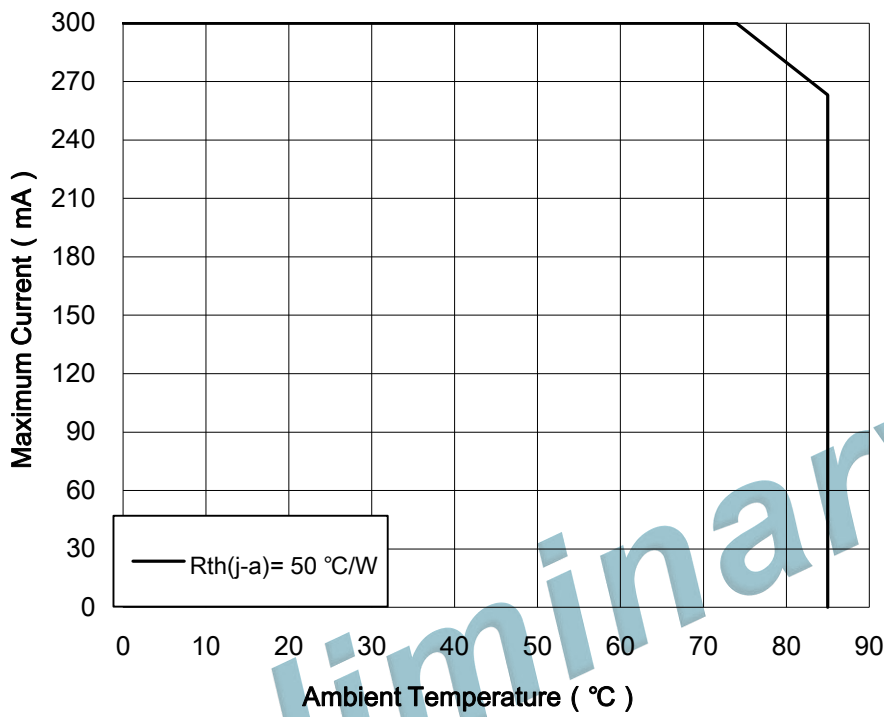

RELATIVE RADIANT FLUX VS. JUNCTION TEMPERATURE

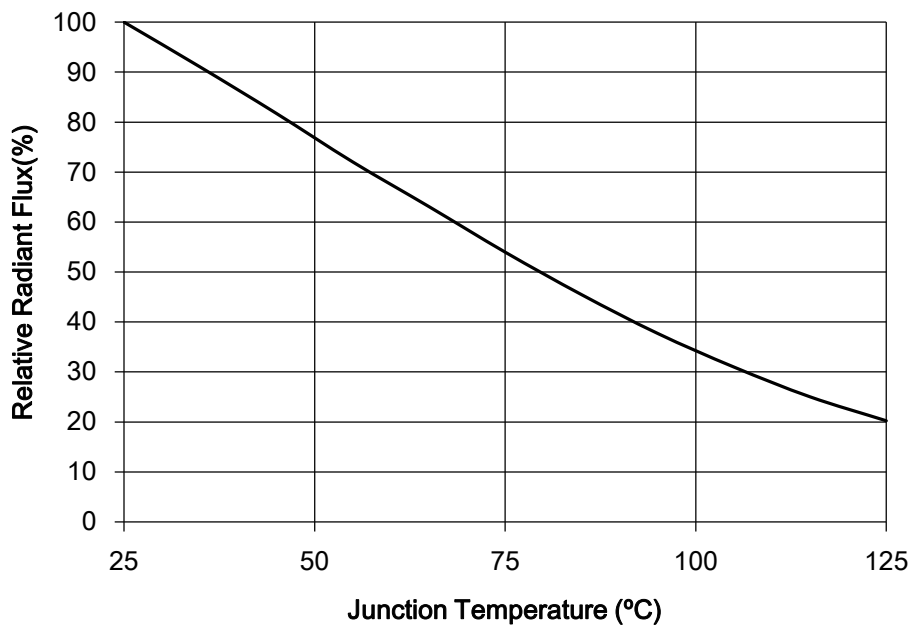

SORTING RANKS**(1) Luminous Flux (Tj=25°C)**

Bin Code	Condition	Min	Max	Unit
AD	150mA	20	26	lm

(2) Forward Voltage (Tj=25°C)

Rank	Condition	Min.	Max.	Unit
V0	150mA	1.9	2.5	V

(3) Dominant Wavelength (Tj=25°C)



Rank	Condition	Min.	Max.	Unit
W1	150mA	615	620	nm
W2		620	625	

REFLOW SOLDERING CHARACTERISTICS

For Reflow Process:


Preheating : 140℃~160℃±5℃,within 2 minutes.
 Operation heating : 260℃(Max.) within 10 seconds.(Max)
 Gradual Cooling (Avoid quenching).

Lead solder		Lead-free solder	
Pre-heat	120-150℃	Pre-heat	150-200℃
Pre-heat time	120 sec.Max.	Pre-heat time	120 sec.Max.
Peak Temperature	240℃ Max.	Peak Temperature	260℃ Max.
Soldering time condition	10 sec.Max.	Soldering time condition	10 sec.Max.
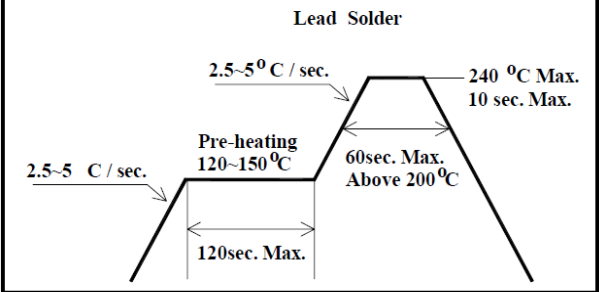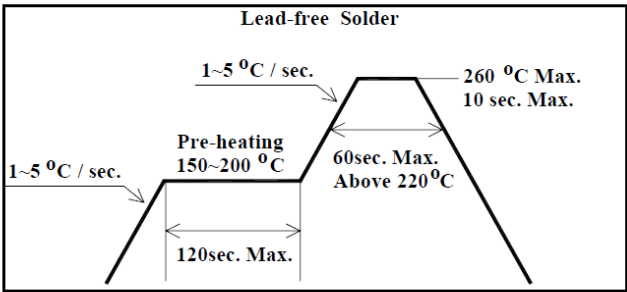
<p>Lead Solder</p>  <p>The diagram shows a reflow profile for Lead Solder. It starts with a heating rate of 2.5~5 °C / sec. to a pre-heating stage at 120~150 °C for a maximum of 120 seconds. This is followed by a second heating rate of 2.5~5 °C / sec. to a peak temperature of 240 °C Max. for a maximum of 10 seconds. The time spent above 200 °C is limited to a maximum of 60 seconds.</p>	<p>Lead-free Solder</p>  <p>The diagram shows a reflow profile for Lead-free Solder. It starts with a heating rate of 1~5 °C / sec. to a pre-heating stage at 150~200 °C for a maximum of 120 seconds. This is followed by a second heating rate of 1~5 °C / sec. to a peak temperature of 260 °C Max. for a maximum of 10 seconds. The time spent above 220 °C is limited to a maximum of 60 seconds.</p>
--	--

Notes:
 The encapsulated material of the LEDs is silicone . Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when using the picking up nozzle, the pressure on the silicone resin should be proper.

TAPE AND REEL

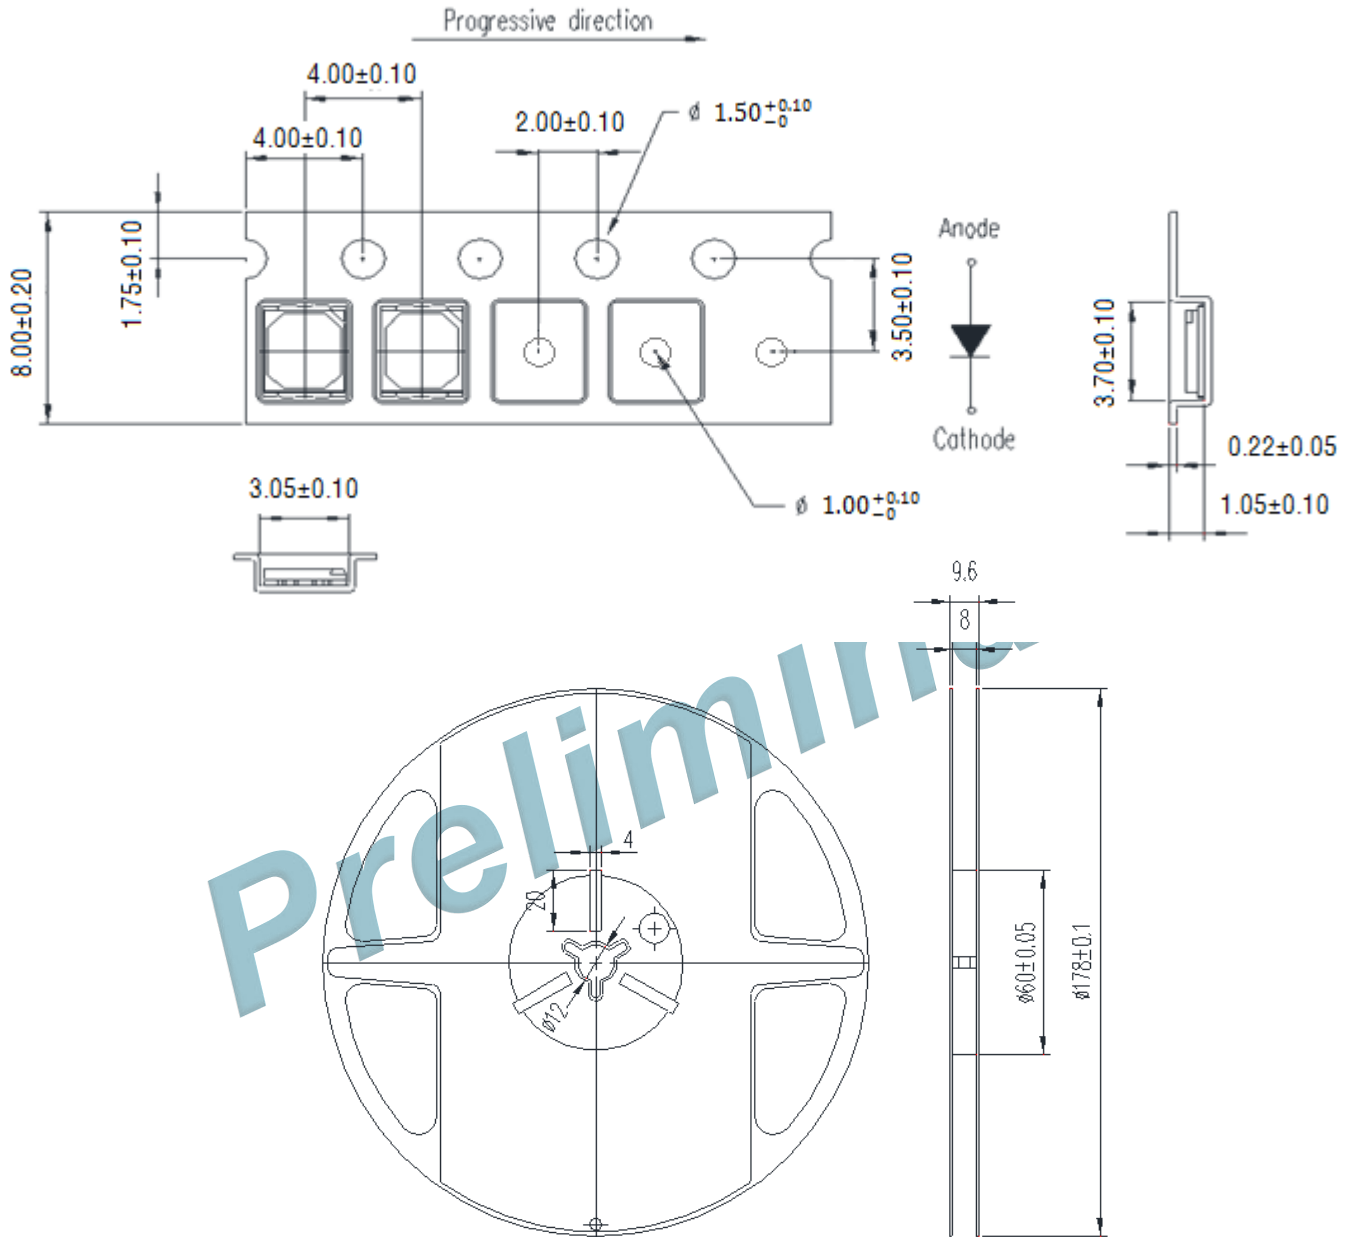


Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$, Unit=mm

Notes:

- (1) Quantity : 3,500pcs/Reel
- (2) Cumulative Tolerance : Cumulative Tolerance/10 pitches to be $\pm 0.2\text{mm}$
- (3) Adhesion Strength of Cover Tape : Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of 10° to the carrier tape
- (4) Package : P/N, Manufacturing data Code No. and quantity to be indicated on a damp proof Package.

PACKAGING

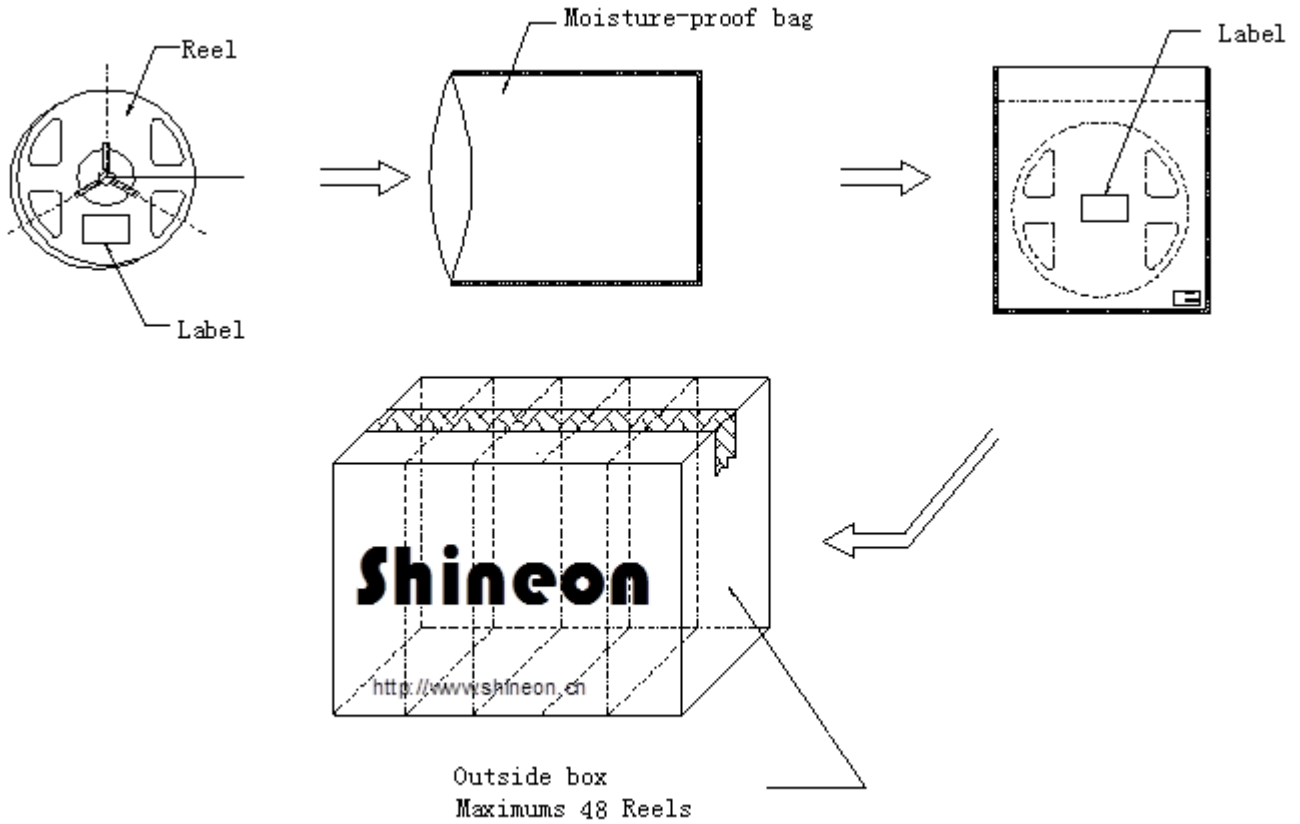

P1

PRECAUTION FOR USE

- (1) This device should not be used in any type of fluid such as water, oil, organic solvent, etc. When washing is required, IPA should be used.
- (2) When the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.
- (3) LEDs must be stored to maintain a clean atmosphere. If the LEDs are stored for 3 months or more after being shipped from ShineOn, a sealed container with a nitrogen atmosphere should be used for storage.
- (4) The LEDs must be used within four weeks after opening the moisture proof packing. Repack unused Products with anti-moisture packing, fold to close any opening and then store in a dry place.
- (5) The appearance and specifications of the product may be modified for improvement without notice.
- (6) This LED is sensitive to the static electricity and surge. It is recommended to use a wrist Band or anti-electrostatic glove when handling the LEDs.
- (7) On manual soldering, a solder tip must be needed as grounded for usage. If over voltage which exceeds the absolute maximum rating is applied to LEDs, it will cause damage LEDs and result in destruction. Damaged LEDs will show some unusual characteristics such as leak current remarkably increase, turn-on voltage becomes lower and the LEDs get unlighted at low current.